

# OVIA™ iTM Slim Series Intelligent Teller Machine



ITM60 series is a new generation cash recycling **Slim ATM** of OVIA™.

It delivers values with its minimized design, efficiency, security, reliability, convenience beyond customer's expectations.

## 📍 The Industry's Smallest Footprint

- The industry's smallest size
- Compact, modern and minimized design
- Maximizes space utilization
- Minimizes operating / maintenance space

## 📍 Maximum Reliability

- Stable and high-speed banknotes processing mechanism
- High speed/precision and powerful (cash / check) recognition
- Advanced error prevention and prompt error recovery

## 📍 Large Capacity


- 11,000 to 13,500 notes
- 1,500 to 3,800 notes of cash cassette capacity
- Up to 6 denominations recycling (with multi-denomination cassette option)
- 3 segment spaces in the large deposit (reject) cassette

## 📍 Customizable

- Various models and specifications can be selected according to customer needs
- Choice of various service models: card issuing type, bankbook printing type, coin hopper type, video calling with handset etc.



\*iTM61 (front service)-Lobby

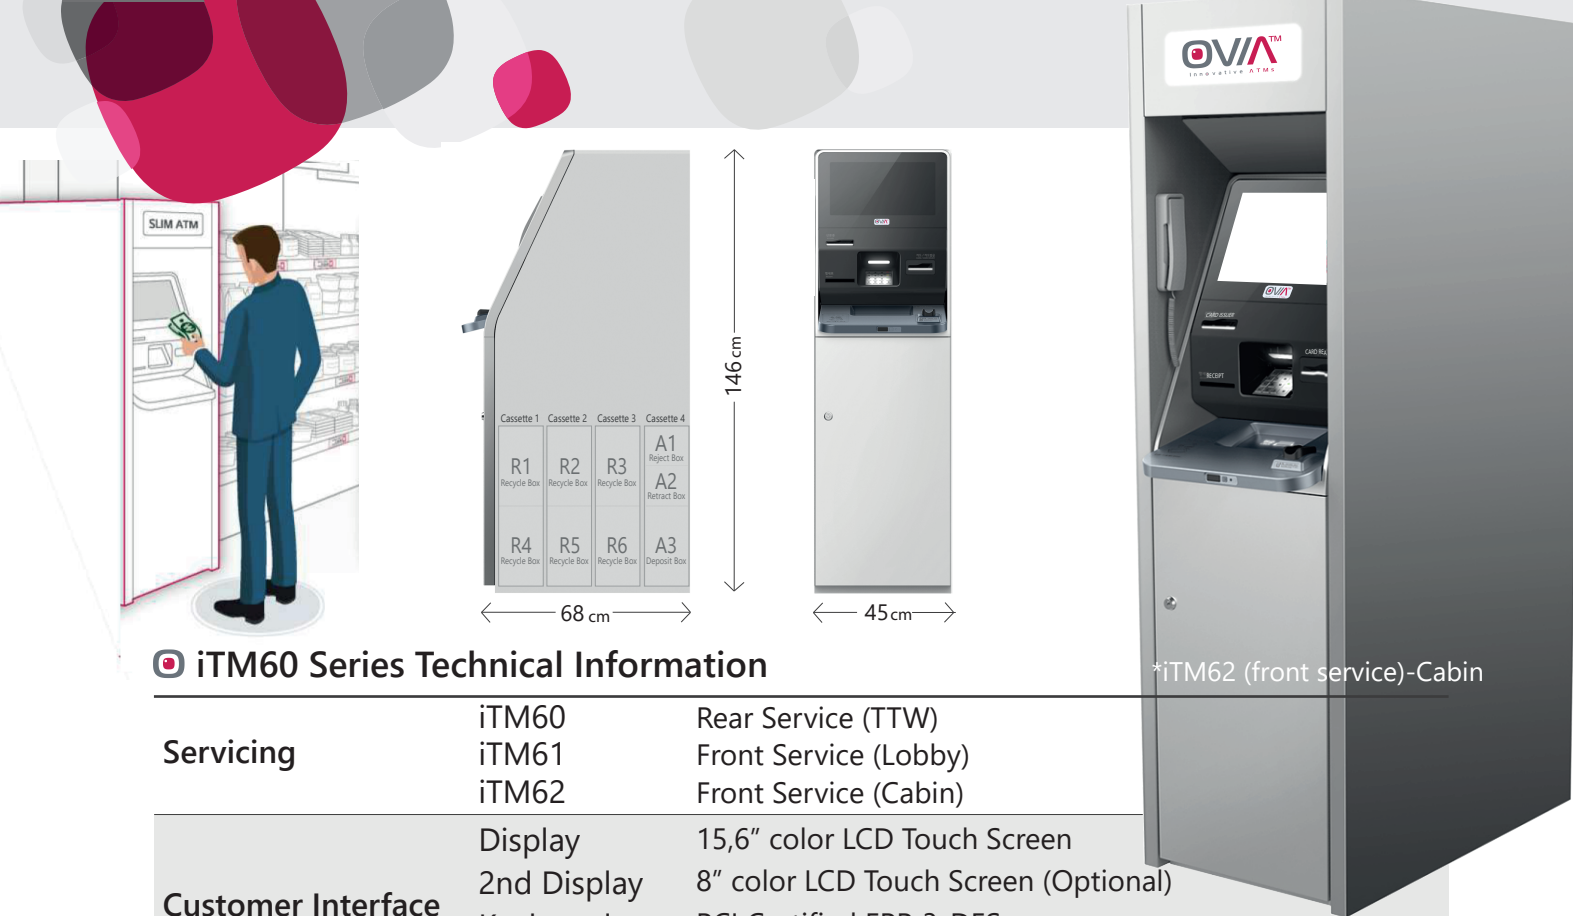

## iTM60 Series Technical Information

<b>Servicing</b>	iTM60 iTM61 iTM62	Rear Service (TTW) Front Service (Lobby) Front Service (Cabin)
<b>Customer Interface</b>	Display 2nd Display Keyboard Other	15,6" color LCD Touch Screen 8" color LCD Touch Screen (Optional) PCI Certified EPP, 3-DES Flicker on all entry/exit points, Speaker, Audio Jack
<b>Operator Panel</b>	Opr. Display	15.6" color LCD Touch Screen (iTM60 TTW only)
<b>Cash Recycling Module (Slim)</b>	3 recycling cassettes (recycling/dispense 3,500/3,800 notes) Option: Multi-denomination cassettes (recycling up to 6 x 1,500 notes) 1 deposit/retract/reject cassette (1,200+400+400 notes) Maximum transaction volume : 220 notes Cash handling speed : 10 notes/sec	
<b>Coin Dispensing Module</b>	3 dispensing hoppers (min 250 coins in each hopper) Maximum transaction volume: 50 coins (mixed)	
<b>Printers</b>	Receipt Journal	Thermal printer (80mm, 220 Ø) Electronic journal (Option: Thermal printer 80mm 220 Ø)
<b>Security Features</b>	Camera Safe Lock	Face, Wrist, (Option: Safe) UL291 Level 1 (Option: CEN L, CEN III) Dial lock + Key lock (long key)
<b>Main Control Unit</b>	Industrial PC	Intel Core i5, RAM 8GB, HDD 500G, DVD-ROM(option)
<b>Software</b>	Windows 7 (Windows 10 migration) , CEN/XFS 3.0	
<b>Power Supply</b>	200-240VAC (50/60Hz)	
<b>Dimensions / Weight (WxDxH, mm) /(Net, kg)</b>	iTM61 iTM60-62	450 x 680 x 1,465 mm / ~375 kg 550 x 710 x 1,900 mm / ~450 kg
<b>Environment</b>	Temperature Humidity	5~40°C (operation) / -20~60°C (storage) 20~80% (operation) / 10~90% (storage)
<b>Other Options</b>	2D Barcode reader, RFID/NFC, Beacon, Biometric readers, UPS EMV Certified Motorized MS/IC with retract capability, Dip card reader Card Issuing Module, Anti-skimming card drive / sensor, Handset	

\* Specifications are subject to change without notice.